

# WATCHGUARD™ WGEDS


## Quick Start Guide



### Introduction:


This guide aims to give you a quick overview of the 2 basic steps required to install your Watchguard™ Emergency Duress System, as well as its basic operation.

### STEP 1. MAIN CONTROL UNIT

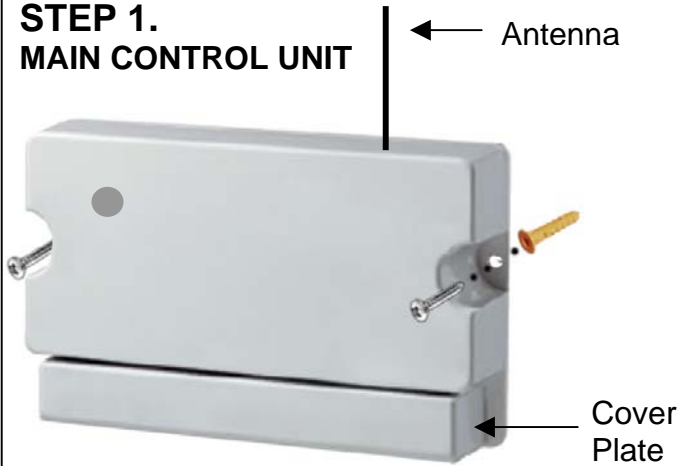

Choose a convenient mounting location to install the main control unit i.e. close to a phone outlet and power point. Drill mounting holes (7mm Diameter) into the chosen location. Mount the unit on the wall using the supplied screws and wall plugs.

### CONNECTIONS

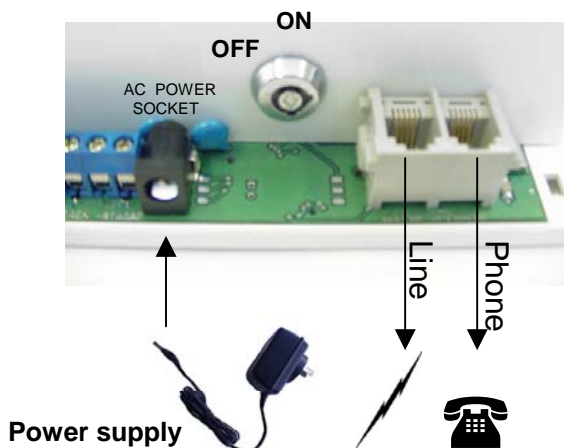

Remove cover plate then connect the phone line into the left side phone socket. If you are using a phone / fax / PC already at your available phone point, you may plug the lead from your existing device into the right side socket. Plug the power supply into a power point and switch on. Straighten the wire antenna for maximum wireless range. Now turn the main key switch to the ON position (do not press the remote).

### STEP 2. REGISTER WITH YOUR PREFERRED MONITORING CENTRE

Simply choose your preferred Monitoring centre contact them and register your details and set up your account.


### BASIC OPERATION



Press the Wireless Emergency Button when you need help. Up to 8 individual Emergency Buttons can be used with your Watchguard™ Emergency Duress System. Each button can be individually identified by the monitoring centre (i.e. Grandma's button, Grandpa's button...etc).



When you press your Wireless Emergency Button it sends an alarm code to your Main Control Unit, which automatically sends your alarm activation data to your monitoring centre via your phone line. The in-built siren will also sound to let you person know that the signal has been received. (Please note, this function can be disabled if being utilised as a "Hold-up Button").



Your alarm monitoring centre will receive the data from your system and your designated contacts will be notified as per your instructions.



"Hello John. This is Sally from the Monitoring Centre. Your Emergency Duress System at 1 Smith Street Sydney has been activated at 11:14am by your Grandma's Emergency Button."



#### System Reset:

After activation the in-built siren will sound for 5 minutes & then continue to beep to indicate the system has been activated & needs re-setting. To reset, press button (1) on your remote. The beeping will stop & the system is once again ready for use.



#### Cancel alarm:

To cancel the siren & reset the system prior to the 5 minute time out, press button (2) on your remote.